

## Feed Mixer ZV 0800

- Ingredients don't lose nutritive properties
- Cuts materials uniformly such that it gets homogeneously mixed
- Gently processing, keeping mixture soft
- No sprockets and chains required
- Low costs of maintenance



The vertical mixers are designed specially to facilitate, to improve and to optimize the mix and punctured of the pasture for the cattle, besides to transport and distribute to the feeding-places or any place that is needed, and it can be operated by a tractor or mounted on a truck.

### 5 Jobs at the Same Time

The Vertical Feed Mixer has a valve to interconnect the hydraulic system to the tractor with only two hoses, with the option to vary depending on your needs.



Simple discharge




Raised discharge



Front two way discharge

It is equipped with a vertical auger designed to carefully cut and mix the ingredients quickly, without losing any nutritive properties, and keeping the mixture soft for easy chewing for cattle. In addition this system reduces the impact on the equipment which makes it more durable.

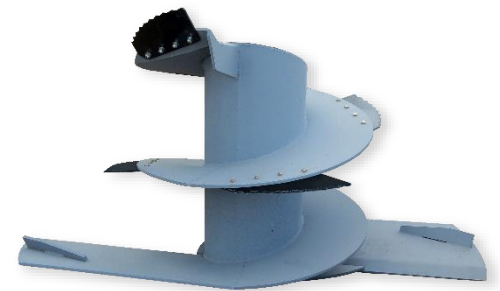

The vertical mixers are equipped with new world class gearboxes, for that no sprockets or chains are required, which means low costs of maintenance.

The cut length is optimized by the restrictor blades with outside regulation, for that the equipment can be used for any type of forage.

Model		ZV0600	ZV0800	ZV1100
Length	In / Mt	171 / 4.34	188 / 4.78	207/5.25
Height	In / Mt	100 / 2.54	107 / 2.72	114/2.89
Capacity	Mt <sup>3</sup> /Ft <sup>3</sup>	6/211.7	8/282.3	11/388.4
Weight	lb / kg	3902 / 1770	4960 / 2250	4960 / 2250
Maximum load	lb / kg	4410 / 2000	6614 / 3000	6614 / 3000
Number of knives	Pza	5	6	7
PTO	Rpm	540	540	540
Minumum HP	Hp	50	60	75
Auger Thickness	In	3/8	1/2	1/2
Floor Thickness	In	1/2	5/8	3/4
Drum wall thickness	In	3/16	3/16	1/4
Auger Speed	Rpm	31	32	29
Wheel axles	No	1	1	1

**Discharge Options**

Simple Discharge				
Discharge Height	In / Mt	22 / .56	29 / .74	27/0.68
Width w/S. Discharg	In / Mt	89 / 2.26	101 / 2.57	113/2.87
Raised Discharge				
Discharge Height	In / Mt	37 / .94	44 / 1.12	42/1.06
Width w/R. Discharg	In / Mt	101 / 2.57	112 / 2.84	124/3.14
Front two way Discharge				
Discharge Height	In / Mt	Not available	26 / .66	27/0.68
Width w/Discharge	In / Mt	Not available	96 / 2.44	98/2.48
Length w/F.T.W. Disc	In / Mt	Not available	205 / 5.21	216/5.48

\*Specifications subject to changes without previous notice

Optional **DIGI★STAR** Scale  
PRECISELY



Campo 4 No 8 Col. Manitoba  
Cauhtémoc, Chihuahua 31500

Tel: +52 (625) 586-6652

Email: info@fehr.mx

Visit our web site to locate nearby Distributors

[www.fehr.mx](http://www.fehr.mx)

